



*Colour highlights extent of Stormsaver works

Installation Services

Think the installation of rainwater harvesting or greywater recycling systems is just added complexity? Stormsaver have you covered with our comprehensive Installation service. Our installation service helps avoid the risk of aborted commissioning visits due to incorrect installation. So, let us take that hassle away from you with our experienced team of installation engineers.

What does our Installation Service include?

- Stormsaver will install the pump, UV, cotton filters and final connections to the control panel. We will supply and install the required interconnecting pipework (Mapress fittings) and wiring between components within the 5 metre area Full commissioning with detailed report.
- Installation of the M&E equipment, all located within the same room (maximum of 5 metres distance between components).

Why choose us?

Eliminate the risk of costly aborted commissioning visits that can delay a project

One less thing to worry about on your project

Confidence that the system has been installed correctly for the end user

A dedicated team of installation engineers who can speed up the installation process

See our options below

Water Reuse Specialists

T: 01636 815 254

W: www.stormsaver.com



Option A Information

Option A includes associated mechanical and electrical works within the plant room.




*Colour highlights extent of Stormsaver works

Suitable base or concrete plinth is required to be complete along with the positioning of the tank, pumps and any other associated M&E items to be carried out prior to our installation visit.

Option B Information

Option B includes associated mechanical and electrical works within the plant room. Option B also includes the installation of associated pipe work and submersible pumps within the main storage tank.

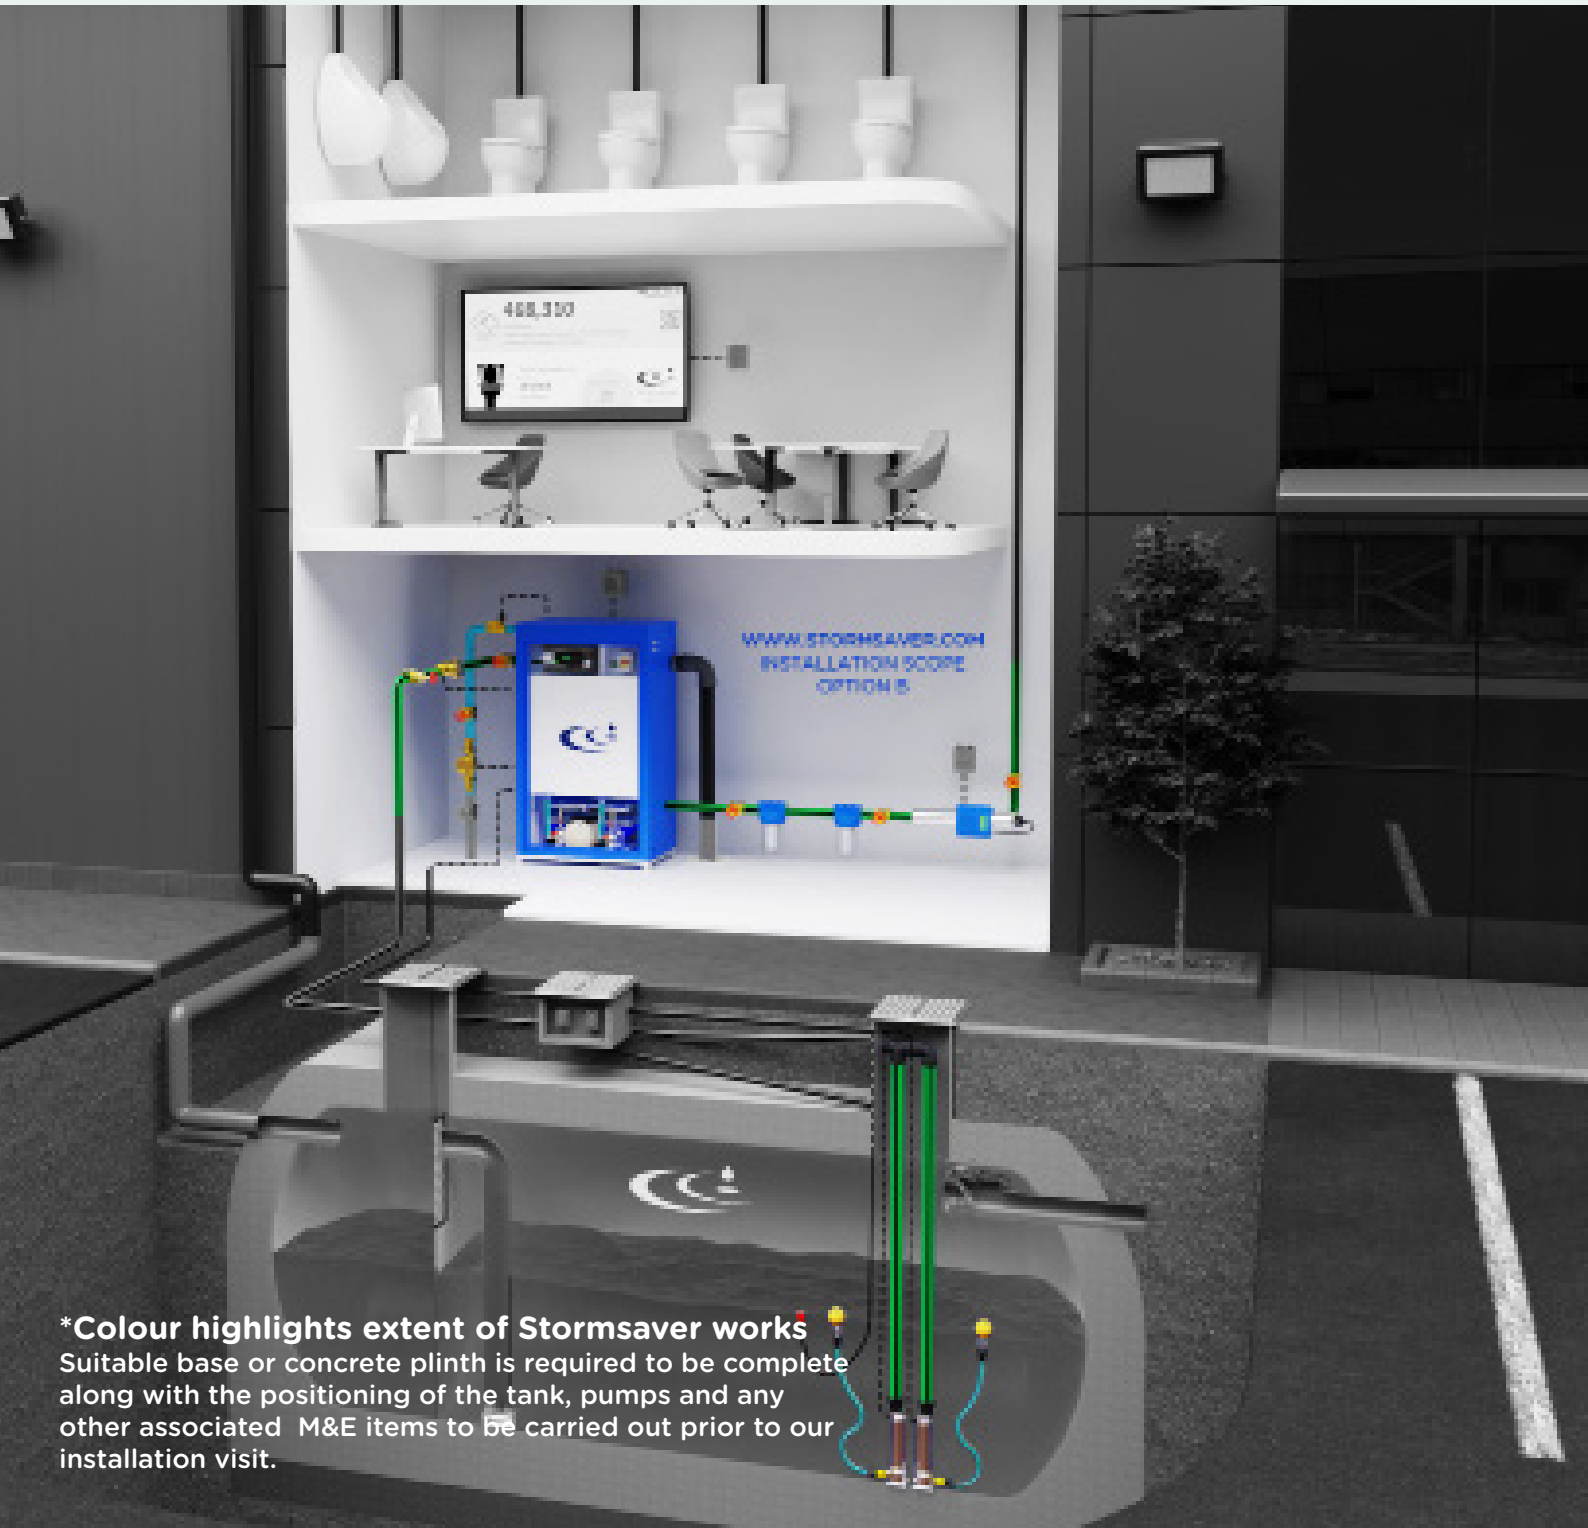

***Colour highlights extent of Stormsaver works**
 Suitable base or concrete plinth is required to be complete along with the positioning of the tank, pumps and any other associated M&E items to be carried out prior to our installation visit.