

Combined System: COMBI Rainwater Harvesting & Greywater

The UK Market Leaders For Water Reuse

T: 01636 815 254


www.stormsaver.com

Stormsaver Combined system: COMBI Rainwater Harvesting & Greywater

1. Rainwater is collected from roof area
2. Rainwater enters drainage through sealed gullies
3. High-level rainwater diverter valve
4. Rainwater passes through pre-tank filter
5. Inlet calmer
6. Overflow from rainwater storage tank with NRV
7. Sump pit with submersible pump
8. Storm drain manhole
9. Rainwater external booster set
10. Optional micron filtration
11. Boosted rainwater supply
12. Greywater is collected from sources, including (but not limited to) hand-wash basins and showers
13. Greywater passes through pre-tank filter
14. Ultra-filtration membranes
15. Aeration blowers
16. Greywater storage tanks
17. Greywater control panel
18. Greywater external booster set
19. Mains cold water supply (top up)
20. Boosted Greywater supply to COMBI
21. Stormsaver COMBI control unit
22. COMBI overflow connection to drain
23. Optional BMS (by others)
24. Local power supply
25. Optional UV disinfection unit
26. Boosted combined supply
27. Points of use

Disclaimer

This schematic is to be used as a general overview of a typical Stormsaver Water Reuse System layout. It is not site specific and should not be relied upon for technical submittal or installation guidance.

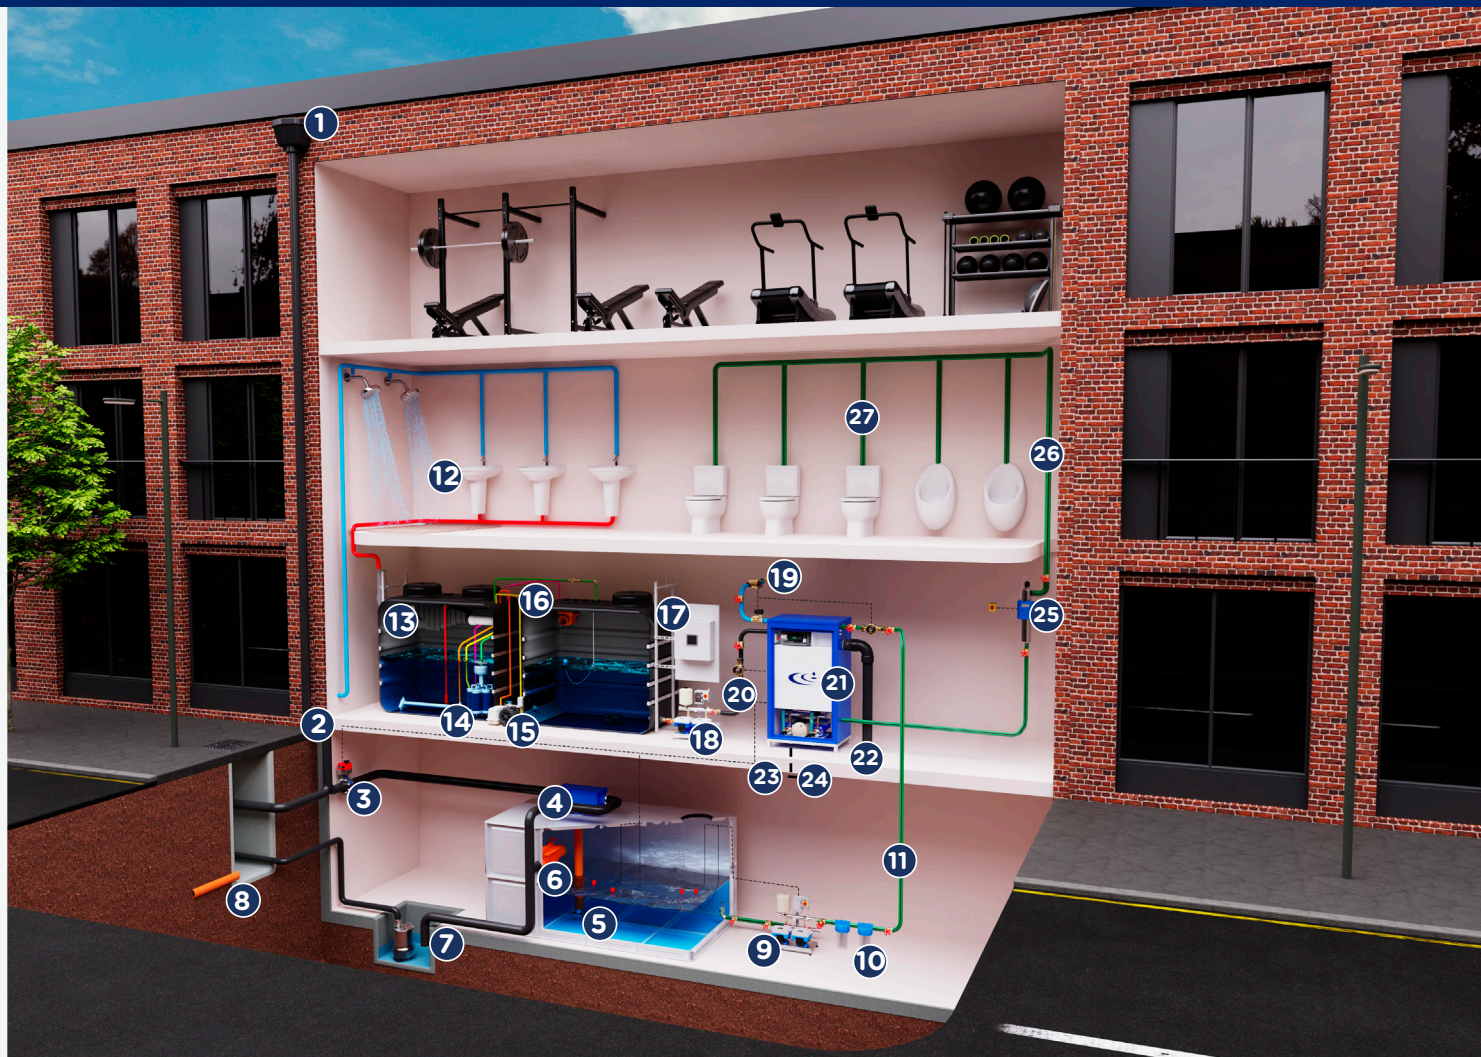

Water Reuse Specialists

T: 01636 815 254

W: www.stormsaver.com

The system design rights and copyright remains the property of Stormsaver Ltd.
 Contact us on 01636 815 254 for more details www.stormsaver.com